



ME & WE
mwpcdtools.com

ME&WE
DIAMOND GRINDING WHEEL
Super Wear-Resistance


ME&WE
PDC DRILL BIT
Longer Drilling Footage

0.35 To 35.0mm Twisting Wire Drawing Dies Stainless Steel Die D12

Our Product Introduction

Basic Information

- Place of Origin: China
- Model Number: Twisting Dies
- Minimum Order Quantity: 1 Piece
- Price: Negotiable
- Packaging Details: Carton, Box
- Delivery Time: 5-10 work days
- Payment Terms: T/T, L/C, Western Union
- Supply Ability: 200 pieces per day

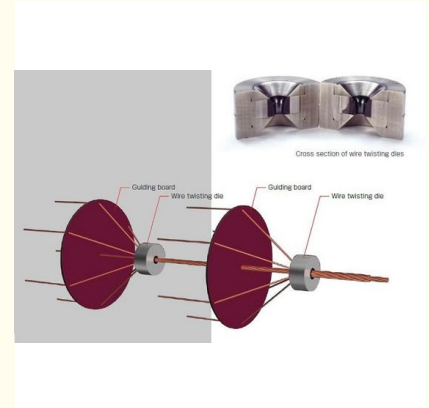

Product Specification

- Wire Drawing Dies: Twisting Dies
- Size: Customized Size
- Casing: Stainless Steel
- Type: Mold Tool
- Application: Twisting
- Transport: By Air
- Highlight: 0.35mm Wire Drawing Dies,
35mm Wire Drawing Dies,
stainless steel die D12

for more products please visit us on mwpcdtools.com

Product Description

Wire Drawing Dies, Twisting Dies

We provide a variety of grades of high-performance cemented carbide die materials, such as precise stamping die materials, cold heading dies and drawing dies. PM cemented carbide provides the products with reasonable hardness, transverse rupture strength and fracture toughness for different working conditions, and designs reliable, optimized and stable production and manufacturing processes, which helps customers to manufacture high-quality mold

1. Description:

In combination with wire twisting dies, which twist many wires together, compacting dies close the gaps between wires by exerting external force.

2. Specifications:

Available Sizes: 0.35~35.0mm.

3. Application:

The resulting strand wires are used as power line cables, wiring harnesses for automobiles, wire ropes, and for other purposes.

inches	mm	ADDMA	Maximum Diameter
0.0039-0.0157	0.100-0.400	D6	0.4
0.0079-0.0315	0.200-0.800	D12	0.8
0.0079-0.0394	0.200-1.000	D12	1.0
0.0197-0.0591	0.500-1.500	D15	1.5
0.0197-0.0591	0.500-1.500	D15	1.5
0.0315-0.0787	0.800-2.000	D18	2.0
0.0315-0.0787	0.800-2.000	D18	2.0
0.0472-0.1181	1.200-3.100	D21	3.1
0.0472-0.1181	1.200-3.100	D21	3.1
0.0591-0.1732	1.500-4.400	D24	4.4
0.0591-0.1732	2.000-4.400	D24	4.4
0.1299-0.2126	3.300-5.400	D27	5.4
0.1299-0.2183	3.300-5.800	D27	5.8
0.2008-0.2992	5.100-7.600	D30	7.6
0.3150-0.4331	8.000-11.000	D33	11.0
0.3150-0.4409	8.000-11.200	D30	11.2
0.3150-0.4724	8.000-12.000	D33	12.0
0.3150-0.4921	8.000-12.500	D33	12.5
0.3150-0.5000	8.000-12.700	D36	12.7



