



ME & WE  
mwpcdtools.com

ME&WE  
DIAMOND GRINDING WHEEL  
Super Wear-Resistance


ME&WE  
PDC DRILL BIT  
Longer Drilling Footage

## 0.35 To 35.0mm Twisting Wire Drawing Dies Stainless Steel Die D12

### Our Product Introduction

#### Basic Information

- Place of Origin: China
- Model Number: Twisting Dies
- Minimum Order Quantity: 1 Piece
- Price: Negotiable
- Packaging Details: Carton, Box
- Delivery Time: 5-10 work days
- Payment Terms: T/T, L/C, Western Union
- Supply Ability: 200 pieces per day

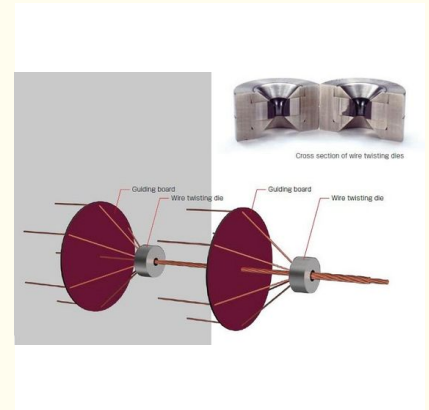

#### Product Specification

- Wire Drawing Dies: Twisting Dies
- Size: Customized Size
- Casing: Stainless Steel
- Type: Mold Tool
- Application: Twisting
- Transport: By Air
- Highlight: 0.35mm Wire Drawing Dies,  
35mm Wire Drawing Dies,  
stainless steel die D12

for more products please visit us on [mwpcdtools.com](http://mwpcdtools.com)

## Product Description

### Wire Drawing Dies, Twisting Dies

We provide a variety of grades of high-performance cemented carbide die materials, such as precise stamping die materials, cold heading dies and drawing dies. PM cemented carbide provides the products with reasonable hardness, transverse rupture strength and fracture toughness for different working conditions, and designs reliable, optimized and stable production and manufacturing processes, which helps customers to manufacture high-quality mold

#### 1. Description:

In combination with wire twisting dies, which twist many wires together, compacting dies close the gaps between wires by exerting external force.

#### 2. Specifications:

Available Sizes: 0.35~35.0mm.

#### 3. Application:

The resulting strand wires are used as power line cables, wiring harnesses for automobiles, wire ropes, and for other purposes.

| inches        | mm           | ADDMA | Maximum Diameter |
|---------------|--------------|-------|------------------|
| 0.0039-0.0157 | 0.100-0.400  | D6    | 0.4              |
| 0.0079-0.0315 | 0.200-0.800  | D12   | 0.8              |
| 0.0079-0.0394 | 0.200-1.000  | D12   | 1.0              |
| 0.0197-0.0591 | 0.500-1.500  | D15   | 1.5              |
| 0.0197-0.0591 | 0.500-1.500  | D15   | 1.5              |
| 0.0315-0.0787 | 0.800-2.000  | D18   | 2.0              |
| 0.0315-0.0787 | 0.800-2.000  | D18   | 2.0              |
| 0.0472-0.1181 | 1.200-3.100  | D21   | 3.1              |
| 0.0472-0.1181 | 1.200-3.100  | D21   | 3.1              |
| 0.0591-0.1732 | 1.500-4.400  | D24   | 4.4              |
| 0.0591-0.1732 | 2.000-4.400  | D24   | 4.4              |
| 0.1299-0.2126 | 3.300-5.400  | D27   | 5.4              |
| 0.1299-0.2183 | 3.300-5.800  | D27   | 5.8              |
| 0.2008-0.2992 | 5.100-7.600  | D30   | 7.6              |
| 0.3150-0.4331 | 8.000-11.000 | D33   | 11.0             |
| 0.3150-0.4409 | 8.000-11.200 | D30   | 11.2             |
| 0.3150-0.4724 | 8.000-12.000 | D33   | 12.0             |
| 0.3150-0.4921 | 8.000-12.500 | D33   | 12.5             |
| 0.3150-0.5000 | 8.000-12.700 | D36   | 12.7             |



